



This is a digital copy of a book that was preserved for generations on library shelves before it was carefully scanned by Google as part of a project to make the world's books discoverable online.

It has survived long enough for the copyright to expire and the book to enter the public domain. A public domain book is one that was never subject to copyright or whose legal copyright term has expired. Whether a book is in the public domain may vary country to country. Public domain books are our gateways to the past, representing a wealth of history, culture and knowledge that's often difficult to discover.

Marks, notations and other marginalia present in the original volume will appear in this file - a reminder of this book's long journey from the publisher to a library and finally to you.

Usage guidelines

Google is proud to partner with libraries to digitize public domain materials and make them widely accessible. Public domain books belong to the public and we are merely their custodians. Nevertheless, this work is expensive, so in order to keep providing this resource, we have taken steps to prevent abuse by commercial parties, including placing technical restrictions on automated querying.

We also ask that you:

- + *Make non-commercial use of the files* We designed Google Book Search for use by individuals, and we request that you use these files for personal, non-commercial purposes.
- + *Refrain from automated querying* Do not send automated queries of any sort to Google's system: If you are conducting research on machine translation, optical character recognition or other areas where access to a large amount of text is helpful, please contact us. We encourage the use of public domain materials for these purposes and may be able to help.
- + *Maintain attribution* The Google "watermark" you see on each file is essential for informing people about this project and helping them find additional materials through Google Book Search. Please do not remove it.
- + *Keep it legal* Whatever your use, remember that you are responsible for ensuring that what you are doing is legal. Do not assume that just because we believe a book is in the public domain for users in the United States, that the work is also in the public domain for users in other countries. Whether a book is still in copyright varies from country to country, and we can't offer guidance on whether any specific use of any specific book is allowed. Please do not assume that a book's appearance in Google Book Search means it can be used in any manner anywhere in the world. Copyright infringement liability can be quite severe.


About Google Book Search

Google's mission is to organize the world's information and to make it universally accessible and useful. Google Book Search helps readers discover the world's books while helping authors and publishers reach new audiences. You can search through the full text of this book on the web at <http://books.google.com/>

A 446617 DUPL

NEW HANDBOOK OF MILITARY SIGNALING

HOWARD A. GIDDINGS

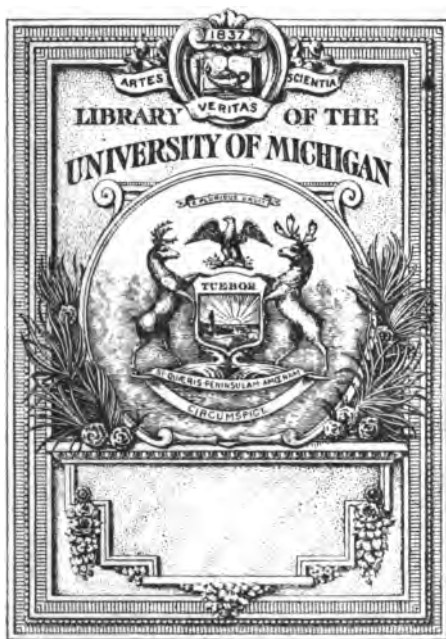

UG

573

.G45

**HANDBOOK OF
MILITARY SIGNALING**

HANDBOOK OF MILITARY SIGNALING

PREPARED BY
CAPTAIN HOWARD A. GIDDINGS
U. S. SIGNAL CORPS (VOL.)



D. APPLETON AND COMPANY
NEW YORK **LONDON**

1917



**COPYRIGHT, 1896, 1917, BY
D. APPLETON AND COMPANY**

Printed in the United States of America

010 Jan 1893

PREFACE

This book, first issued in 1896 under the title "Instructions in Military Signaling," has been revised at the urgent request of the publishers. The changes in codes and signaling systems have been so extensive that the handbook is in effect a new one.

The signal codes, conventional signals, letter codes, emergency signals, etc., are taken from the Signal Book, U. S. Army, 1916. These codes are public documents and cannot be copyrighted. The copyright upon this book relates only to its general arrangement and those portions not comprehended in public documents. The parts relating to the compass and its use and to map reading are a combination of matter in previous editions and recent articles by the author appearing in *Outing* magazine. They are necessarily elemental, and for further elaboration of details one of the several excel-

318001

lent books upon topography, military sketching,
map reading, etc., should be consulted.

HOWARD A. GIDDINGS,
Capt. U. S. Signal Corps (Vol.).

Hartford, Connecticut,
September 1, 1917.

CONTENTS

	PAGE
CODES	11
The American Morse Code.....	11
Alphabet	11
Numerals	12
Punctuation	12
Abbreviations	13
Conventional Signals for Use with the American Morse Code	14
Transmission of Field Messages by American Morse	15
The International Morse General Serv- ice Code	17
Alphabet	17
Numerals	18
Punctuation	18
Conventional Signals for Use by Radio Stations with the International Morse Code	19
Transmission of Messages by Interna- tional Morse Code	22
VISUAL SIGNALING IN GENERAL.....	24

	PAGE
GENERAL INSTRUCTIONS FOR ARMY SIGNAL- ING	27
ORDER OF SENDING A MESSAGE.....	28
VISUAL SIGNALING: BY FLAG, TORCH, HAND LANTERN, OR BEAM OF SEARCH- LIGHT (WITHOUT SHUTTER)	29
General Service Code	29
SIGNALING WITH HELIOGRAPH, FLASH LAN- TERN, OR SEARCHLIGHT (WITH SHUTTER)	33
General Service Code	33
THE FLAG	35
Signaling with the Flag.....	36
THE HELIOGRAPH	39
Setting Up and Adjusting.....	43
Remarks	47
FIELD STATIONS	54
THE ARDOIS SYSTEM	64
General Service Code.....	64
Rules for Using the Ardois System of Signaling	65
HAND FLAGS	67
LETTER CODES	72
Infantry	72

CONTENTS

ix

	PAGE
Cavalry	73
Field Artillery	75
EMERGENCY SIGNALS	80
Emergency Signals for Use on Cable and Telegraph Lines	81
Emergency Signals for Use in Radio- telegraphy	81
Notice to be Posted in All Radio Sta- tions	82
Signals of Distress on Army Transports and Vessels Under Control of the Army	83
Emergency Signals with Bombs (or Other Explosive), Small Arms, or the National Ensign	85
Emergency Signals by Sound with Bell, Whistle, Foghorn, Bugle, Trum- pet, or Drum	86
MESSAGES IN CIPHER	88
THE COMPASS	92
TABLE OF APPROXIMATE MAGNETIC DECLINA- TIONS AT VARIOUS POINTS IN THE UNITED STATES, 1917.....	98
MILITARY MAP READING	107

The Signal Codes herein were approved and issued for the information and government of the military forces of the United States by order of the Secretary of War under date of April 15, 1916.

HANDBOOK OF MILITARY SIGNALING

CODES

THE AMERICAN MORSE CODE

1. The American Morse Code is used by the Army in the operation of land telegraph lines, short cables, and field telegraph lines. It is written as follows:

Alphabet

A .—	L ———
B —...—	M ———
C .. .	N —.
D —..	O . .
E .	P—
F .—.	Q ..—.
G ——. .	R . ..
H	S ...
I ..	T —
J —.—.	U ..—
K —.—	V ...—

W .— —

Z

X .— ..

&

Y

Numerals

1 .— — .

6

2 .. — ..

7 — — ..

3 ... — .

8 —

4 —

9 — .. —

5 — — —

0 — — —

Punctuation

Period — — ..

Comma — — —

Interrogation — — — .

Hyphen (HX) — ..

Dash (DX) — .. — ..

Parenthesis (begin) (PN) — .

Parenthesis (end) (PY)

Quotation marks (begin) (QN) .. — . — .

Quotation marks (end) (QJ) .. — . — . — .

Dollar mark (SX) ... — ..

Decimal point Spell "dot."

Capitalized letter (CX) ... — ..

Brackets (BX) — ... — ..

Colon	(KO)	— . — . .
Semicolon	(SI)
Underline (begin)	(UX)	.. — . — ..
Underline (end)	(UJ)	.. — — . — .
Colon dash	(KX)	— . — . — ..
Colon followed by quotation. (KQ)		— . — . — .
Exclamation point	(!)	— — — .
Fraction bar	(/)	.
Paragraph mark	(¶)	— — — —
Pounds, sterling	(£) (PX) — ..
Shilling mark	(UT)	.. — —

Abbreviations

af	after
ahr	another
b	be
bf	before
bn	been
ck	check
cn	can
da	day
dl	day letter
dpr	day press rate
fm	from
gn	good-night

govtgovernment
hrhear or here
hvhave
msgmessage
nitenight
nlnight letter
nprnight press rate
obofficial business
pdpaid
rare
tthe
uyou
uryour
wwith
wrđword
x (in check).....get a reply to this message
5Have you anything for me?
13understand

CONVENTIONAL SIGNALS FOR USE WITH THE
AMERICAN MORSE CODE

2. The following conventional signals are used on military telegraph lines, short cables, and field lines:

Attention, all operators.....(9) —...—
 Please start me (or) where
 shall I start.....(4)—
 Wait a moment.....(MIN) —— .. —.
 Official message(OFM) . . . —. — —
 I understand(OK) . . —. —
 Busy on other wires.....(25) .. — .. — — — —
 No more(NM) —. — —
 Test, give away.....(WIRE) . — —
 Break(BK) — — —. — —
 Go ahead(GA) — — —. —
 Error(DN) — .. —.
 Signature follows(SIG) — — .

TRANSMISSION OF FIELD MESSAGES BY AMERICAN
MORSE

3. The sending operator will enter the time *when the message is handed him for transmission*, in the left-hand corner at the bottom of the blank opposite the word "Received." He will enter in the proper places, at the head of the blank, the number of the message, the call letter of his station, with his personal signal, the check (number of words or groups of cipher

contained in message, *counting address and signature*), and after "O. K." has been received he will enter the time the message was sent and the call letter of the receiving station, with the personal signal of the receiving operator.

4. To transmit a message the operator will send (1) the number of the message and call letter of his station; (2) his personal signal; (3) the check; (4) "fm," followed by the name of the sending detachment; (5) "at," followed by the location of the sending detachment and date; (6) "ho," followed by the hour (a. m. or p. m.) message was written; "No." (Sender's serial number); (7) "to," followed by the address in full; (8) period (..— —.); (9) body or text of the message; (10) "sig," followed by the signature of the message.

THE INTERNATIONAL MORSE OR GENERAL SERVICE CODE

5. The International Morse Code is the General Service Code and is prescribed for use by the Armies of the United States and between the Armies and the Navy of the United States. It is used on radio systems, submarine cables using siphon recorders, and with the heliograph, flash-lantern and all visual signaling apparatus using the wig-wag.

Alphabet

A .—	K —.—
B —...	L .—..
C —.—.	M ——
D —..	N —.
E .	O ———
F ..—.	P .—.—.
G ——. .	Q ——. —
H	R .—.
I ..	S ...
J .— — —	T —

U ..—	X —..—
V ...—	Y —.——
W .——	Z ——..

Numerals

1 .— — — —	6 —....
2 ..— — —	7 — — ...
3 ...— —	8 — — — ..
4—	9 — — — — .
5	0 — — — — —

Punctuation

Period
Comma—..—.
Interrogation— — ..
Hyphen or dash.....	—....—
Parenthesis (before and after the words)	—..—..—
Quotation mark (beginning and ending)—..—.
Exclamation	—..— — —
Apostrophe— — — — .
Semicolon	—..—..—.
Colon	— — — — ...
Bar indicating fraction.....	—..—.

Underline (before and after the word or words it is wished to underline) — — — — —
 Double dash (between preamble and address, between address and body of message, between body of message and signature, and immediately before a fraction) — . . . —
 Cross — . — .

CONVENTIONAL SIGNALS FOR USE BY RADIO STATIONS WITH THE INTERNATIONAL MORSE CODE

6. The following conventional signals will be used by radio stations of the United States Armies with the International Morse Code:

Distress signal (ship stations only) ... — — — ...

Attention (or call) .. The call is composed of the attention signal — . — . — followed by the call letters of the station called, repeated three times [if unknown

use CQ (— . — . — . — .
 —) in place of call letters of station called],
 followed by DE (— . . .)
 and then the call letters of the calling station, repeated three times.

Have you anything
 for meQRU (— — . — . — . —)
 How many words
 have you to send..QRJ (— — . — . — .
 . — — —)

Invitation to transmit (go ahead) — . —

Signal separating
 preamble from address, address from
 text, and text from
 signature..... — . . . —

End of message... . — . — .

End of work..... — . — . — followed by the
 call letter of sending station and — . —

Received (acknowledgment of receipt of message)R (.—.), followed by the call letter of the receiving station and personal signal of the receiving operator.

Here is another message..... —.—.— (attention call).
Understood (or I understand)..... ...—., followed by the call letters of station.

Not understood (or repeat)—.—.. (Interrogatory) and the last word received.

Error

Wait— ..

Official message OFM (— — — .. — — —)

(First word of preamble on all radio-grams) RADIO (.—. .— —.. .. — — —)

FasterQRQ (— — . — . — .
— — . —)

SlowerQRS (— — . — . — . —)

Stop sendingQRT (— — . — . — . —)

InterferenceXX (— .. — — .. —)

Use International

Code of Signals...PRB(. — — . — . — ..)

General inquiry call

(when call of sta-

tion is not known). CQ (— . — . — — . —)

(see attention call).

How do you receive

meQRK (— — . — . — .
— . —)

TRANSMISSION OF MESSAGES BY INTERNATIONAL MORSE CODE

EXAMPLE

WVB sending to WVA a plain commercial
message filed at 4 p. m., of the 12th, after re-
ceiving — . —

— . — . —

RADIO

Circle CityOffice of destination.

De.

Fairbanks Office of origin.

2 Number of message.

L Operator's sign.

8 Check.

Twelfth 4 pm..... Date and hour of filing.

—...— Break or double dash.

Brown 175 King Street

Circle City Address.

—...— Break.

Arrive tomorrow Text.

—...—..... Break.

Jones Signature.

.—.—.

KMO

—.—

VISUAL SIGNALING IN GENERAL

7. Methods of visual signaling treated herein are divided as follows:

(a) By flag, torch, hand lantern, or beam of searchlight (without shutter). (General Service Code.)

(b) By heliograph, flash lantern, or searchlight (with shutter). (General Service Code.)

(c) By Ardois. (General Service Code.)

(d) By hand flags. (Two-arm semaphore Code.)

8. The following conventional signals, with exceptions noted, will be used.

	Interval.	Exceptions
End of word.	Interval.	Ardois.
End of sentence.	Double interval.	
End of message.	Triple interval.	
Signal separating preamble from address; ad- dress from text; text from sig- nature.	— . . . —	Double interval, signature pre- ceded also by "Sig." inter- val.

Acknowledgment.	R.	
Error.	A.
Negative.	K.	
Preparatory.	L.	
Annuling.	N.	
Affirmative.	P.	
Interrogatory.	.. — — ..	O.
Repeat after word.	Interrogatory, A (word).	
Repeat last message.	Interrogatory three times.	
Send faster.	QRQ	
Send slower.	QRS	
Cease sending.	QRT	
Wait a moment.	.. — ...	None.
Execute.	IX, IX.	
Move to your right.	MR	
Move to your left.	ML	
Move up.	MU	
Move down.	MD	
Finished (end of work).	... — — —	None.

9. *Note.*—In order to differentiate these signals from important battle signals, the Navy uses certain distinguishing variations which are not necessary in signaling in the Army. In making the conventional signals for “A,” Error, and “O,” Interrogatory, in Ardois, the Navy indicates them by pulsating the upper light; in

making them in semaphore, by agitating the arms or flags. "K," Negative; "L," Preparatory; "N," Annuling; "O," Interrogatory; and "P," Affirmative, in the Navy are secondary meanings, and are used only in connection with Navy Code Books. They should not be used in communication between Army and Navy.

In communicating with the Navy, by all methods, numerals will be spelled out.

10. "Intervals" are expressed as follows in the various systems:

	Interval.	Double interval.	Triple interval.
Radio.	} — space.—.—.—.
Flashing.			
Occulting light.			
Sound.	} Front.	(Twice.)	(3 times.)
Wigwag.			
Hand flags.	Flags crossed.	2 chops.	3 chops, withdraw flags.
Ardois.	. — . —	(Twice.)	(3 times.)

GENERAL INSTRUCTIONS FOR ARMY SIGNALING

11. Each signal station will have its call, consisting of one or two letters; as Washington, "W"; and each operator or signalist will also have his personal signal of one or two letters, as Jones, "Jo." These being once adopted will not be changed without due authority.

To lessen liability of error, numerals which occur in the body of a message should be spelled out.

In receiving a message the man at the telescope should call out each letter as received, and not wait for the completion of a word.

A record of the date and time of the receipt or transmission of every message must be kept.

The duplicate manuscript of messages received at, or the original sent from, a station should be carefully filed.

In receiving messages nothing should be taken for granted, and nothing considered as seen until it has been positively and clearly in view. Do

not anticipate what will follow from signals already given. Watch the communicating station until the last signals are made, and be very certain that the signal for the end of the message has been given.

Every address must contain at least two words and should be sufficient to secure delivery.

All that the sender writes for transmission after the word "To" is counted.

Whenever more than one signature is attached to a message count all initials and names as a part of the message.


ORDER OF SENDING A MESSAGE

12. 1—Number of message.
- 2—Place from, and date.
- 3—Address in full.
- 4—Body of message.
- 5—Sig (signature follows).
- 6—Signature.

**VISUAL SIGNALING: BY FLAG, TORCH,
HAND LANTERN, OR BEAM OF
SEARCHLIGHT (WITHOUT
SHUTTER)**


GENERAL SERVICE CODE

13. For the flag used with the General Service Code there are three motions and one posi-

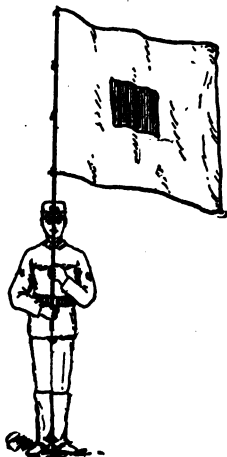

Position


tion. The position is with the flag held vertically, the signalman facing directly toward the station with which it is desired to communicate.

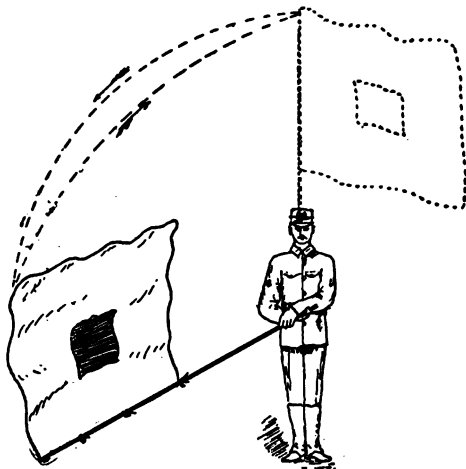

Dot

The first motion (the dot) is to the right of the sender, and will embrace an arc of 90° , starting with the vertical and returning to it, and will

be made in a plane at right angles to the line connecting the two stations. The second motion

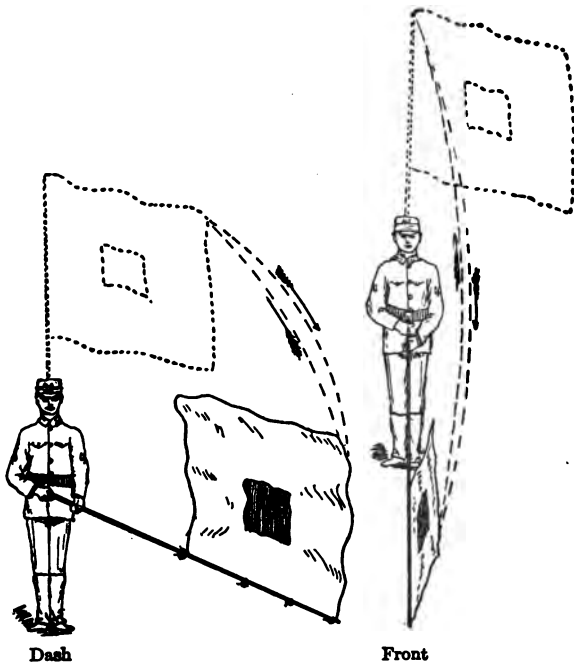

(the dash) is a similar motion to the left of the sender. The third motion (front) is downward directly in front of the sender and instantly returned upward to the first position. Front is used to indicate an interval.

14. The beam of the searchlight, though ordinarily used with the shutter like the heliograph, may be used for long-distance signaling, when no shutter is suitable or available, in a similar manner to the flag or torch, the first position being a vertical one. A movement of the beam 90° to the right of the sender indicates a dot, a similar movement to the left indicates a dash; the beam is lowered vertically for front.

To use the torch or hand lantern, a footlight must be employed as a point of reference to the motion. The lantern is most conveniently swung out upward to the right of the footlight for a dot, to the left for a dash, and raised vertically for front.

SIGNALING WITH HELIOGRAPH, FLASH LANTERN, OR SEARCHLIGHT (WITH SHUTTER)

GENERAL SERVICE CODE

15. The first position is to turn a steady flash on the receiving station. The signals are made by short and long flashes. Use a short flash for dot and a long steady flash for dash. The elements of a letter should be slightly longer than in sound signals.

To call a station make its call letter until acknowledged.

If the call letter of a station be unknown, signal A until acknowledged. Each station will then turn on a steady flash and adjust. When the adjustment is satisfactory to the called station, it will cut off its flash, and the calling station will proceed with its message.

16. If the receiver sees that the sender's mirror or light needs adjustment, he will turn on a steady flash until answered by a steady flash.

When the adjustment is satisfactory, the receiver will cut off his flash and the sender will resume his message.

To break the sending station for other purposes, turn on a steady flash.

It may be noted that in the daytime and in ordinary weather the searchlight with shutter can be readily used for distances up to 10 miles at sea. This method of day signaling is considered of exceptional value by the Navy, and is commonly used by the Coast Artillery in target practice from the shore to the tug towing the target. It is independent of background and may be used behind armor or other shelter; it should be frequently used for signaling by day as well as by night.

THE FLAG

17. Signal flags are made of muslin or other material of light and close texture, are square in shape, and have a smaller square in the center, comprising one-ninth of the surface of the flag, of a different color from the body of the flag.

Those commonly used are: The white flag, four feet square, having a red block sixteen inches square in its center. The red flag, four feet square, having a white block sixteen inches square in its center. The white flag, two feet square, having a red block eight inches square in its center. The red flag, two feet square, having a white block eight inches square in its center.

In addition to the above, six-foot flags with centers two feet square are often used, and black flags with white centers are sometimes the most suitable, as in case of sky backgrounds.

All flags are fitted with tapes on one edge,

one foot apart, for tying them to the staff. The staff is in two, three, or four joints, each four feet in length. Two or three joints are ordinarily used, but the longer the distance the larger the flag and longer the staff.

SIGNALING WITH THE FLAG

18. The signalman is first instructed in the use of the two-foot flag, on the upper joint. He takes the position of the soldier, faces exactly toward the receiving station, with the staff vertical in front of the center of his body, holding it with either hand at the butt, which should be at the height of the waist.

An imaginary line, from a point between the feet of the sender to the receiver, is called the *line of vision*.

In swinging the flag, each motion to the right or left should be exactly at right angles to the line of vision, and each front motion should be in the line of vision. To insure this, stakes may be driven in the line of vision a short distance in front of the flagman and at right angles to it, the same distance to the right and left. The

staff should point in the direction of one of these stakes at each wave.

Expert signalmen will not need the stakes for day signaling.

The instructor should explain to the recruit how to keep the flag open and prevent its fouling with the staff, by giving the end of the staff a slight *scoop* as it reaches the lowest point in its motion.

The scoop should be made against the wind.

The importance of clean, clear cut motions of the flag in a plane exactly at right angles to the line of vision cannot be overestimated.

The staff should be kept as upright as possible, and the flag kept open, as when fouled on the staff it may become quite invisible during several motions.

In a clear atmosphere the four-foot flag may be read with the naked eye four or five miles; with a field glass or telescope about twice as far.

19. *Powers and limitations of flag signaling.*
—The advantages which may be claimed for this method of signaling are portability of apparatus, adaptability to varied weather conditions,

and great rapidity of station establishment. The disadvantages are the lack of celerity of the signals, their impenetrability to dust or smoke, and the comparatively short ranges at which they can be read. These ranges vary with the background, light, vision, and power of glasses if used.




20. *Care of flag material.*—Signal flags should be examined at the close of drill or use and repairs made to any rents or loose ties discovered. Flags, when soiled, should be thoroughly washed and dried in the sun. Signals made by clean flags are much more easily read than those made by dirty ones. Staffs should be handled with care, especially when jointing or unjointing. Care should be taken not to bruise the ends of the brass ferrules. Ferrules fitting together so loosely as to permit separation of the joints in signaling must not be hammered or jammed, but should be tightened by wrapping one or more thicknesses of thin paper around the one which is inserted in the other. If a ferrule becomes loose on a staff it should be tightened without delay.

THE HELIOGRAPH

21. The field heliograph equipment consists of—

x. A sole-leather pouch, containing:

One sun mirror.	} Inclosed in a wooden box.
One station mirror.	
One shutter. One sighting rod. One screw-driver.	

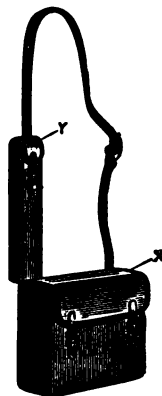


- Y. A smaller pouch, sliding by two loops upon the strap of the larger, containing one mirror bar.
- Z. A skeleton case, of leather, containing two tripod stands.
- C. Sun mirror.
- D. Station mirror.
- E. Mirror supports.
- F. Tangent screws for revolving mirror about horizontal axis.
- G. Mirror bar.
- H. Tangent screw with ball bearings for revolving mirror about vertical axis.
- I. Clamp screw for attaching mirror bar to tripod.
- K. Spring for clamping mirrors and sighting rod.
- L. Sighting rod with movable disk.
- M. Shutter.
- N. Key for shutter.

22. The sun mirror has an unsilvered spot at its center, the station mirror a paper disk. In other respects they are similar. The tangent-screw attachment to the frame affords the means



(Latest style shutter has six leaves)

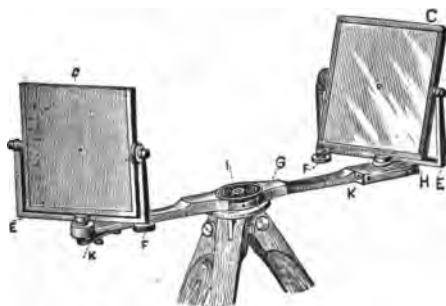

of revolving the mirror about a horizontal axis.

The support to the frame has a conical projection accurately turned to fit the socket of the mirror bar and grooved to receive the clamp spring.

The shutter has leaves, operated by means of a key.

The base of the frame carries a female screw for attachment to the tripod.

23. The sighting rod is fitted to the socket of the mirror bar, and is clamped in the same manner as the mirrors. It carries at one end a movable disk, which when turned down reveals the front sight. A piece of white paper should be slipped into the disk to receive the "shadow spot," and a slight puncture made therein, coincident with the point of the front sight, as guide in adjustment. Vertical adjustment of the disk is made possible by loosening the milled slide.

24. The mirror bar is provided with a clamp threaded to fit the screw of the tripod. The release of the clamp permits movement of the bar independent of the screw. At one end is at-

tached the tangent screw for revolving mirror about a vertical axis, and it should be remembered that *under all circumstances the sun mirror is to be clamped to this end*, while the socket at the other extremity is designed to receive the station mirror or the sighting rod. A movable spring is placed under each end of the bar for clamping mirrors and sighting rod.

25. The tripods are similar, the screw of either serving equally well for the attachment of mirror bar or shutter.

Both are provided with a hook for the suspension of a weight, to give great stability when required.

SETTING UP AND ADJUSTING

26. The position of the sun is the guide for determining whether one or two mirrors should be used. When the sun is in front of the operator—that is, in front of a plane through his position, at right angles to the line of vision—the sun mirror only is required. With the sun in rear of this plane both mirrors should be used, although a single mirror may often be worked to advantage with the sun well back of

the operator. In the former case the rays of the sun are reflected from the sun mirror direct to the distant station. In the latter they are reflected from the sun mirror to the station mirror, thence to the distant station.

27. *With one mirror:* Set the tripod firmly on the ground, attach the bar to the tripod, insert and clamp in their appropriate sockets the sun mirror and the sighting rod, the latter with its disk turned down. Sight through the center of the mirror and turn the bar and raise or lower the sighting rod until the center of the mirror, point of sighting rod, and distant station are accurately in line; then clamp the bar firmly to the tripod, being careful not to disarrange the alignment.

Turn up the disk of the sighting rod. Move the mirror by means of the slow-motion screws until the "shadow spot" falls upon the disk of the sighting rod. The flash will then be visible to the distant observer.

The shadow spot must be kept in the center of the disk while signaling, and should be kept there by constant adjustment of the mirror. At-

tach the shutter to the tripod, and place it close to and in front of the sighting disk so as to intercept the flash.

28. *With two mirrors:* Set the tripod firmly on the ground, clamp the bar diagonally across the line of vision to the distant station, clamp the sun mirror facing the sun to the end of the bar with tangent-screw attachment, and the station mirror facing the distant station to the other socket.

Stooping down, the head in rear of and near the station mirror, turn the sun mirror by means of its slow-motion screws until the whole of the station mirror is seen reflected in the sun mirror, and the unsilvered spot and reflection of the paper disk accurately cover each other. Still looking into the sun mirror, turn the station mirror until the reflection of the distant station is brought accurately into line with, or is covered by, the unsilvered spot and the reflection of the paper disk. After this the station mirror must not be touched.

Now, stepping behind the sun mirror, throw upon the station mirror a full flash from the

sun mirror, so that the shadow spot falls upon the center of the paper disk. The flash will then be visible at the distant station.

The shadow spot must be kept in the center of the disk while signaling, and should be kept there by constant adjustment of the mirror. At-



Heliograph station, roof of warehouse.

tach the shutter to its tripod and place it so as to intercept the flash from the station mirror.

29. Signaling is effected by depressing the shutter key for periods of time required to display flashes.

A dot is represented by a momentary exposition of the flash.

A dash by a long steady flash.

It is of the utmost importance that uniformity in mechanical movement of the shutter be cultivated, as lack of rhythm in the signals of the sender entails unnecessary and vexatious concentration of attention upon the receiver.

The flashes should be sharp and clear cut.

REMARKS

30. In setting up the instrument, spread the tripod legs sufficiently to give a good base, and on yielding soil press firmly into the ground, the head approximately level. In a high wind, ballast by hanging a substantial weight to the hook.

If the legs become loose at the head joints, apply the screw-driver to the assembling screws.

31. See that the shutter completely obscures (cuts off) the flash, also that the flash passes entire when the key is depressed.

The spring should return the shutter sharply to its normal position when the key is released. If it fails to respond promptly, strengthen or replace.

32. *Extra care bestowed on preliminary adjustment is repaid by increased brilliancy of flash.* With alignment absolutely assured, and the shadow spot at the center of the disk, the axis of the cone of reflected rays is coincident with the line of sight, and the distant station receives the greatest possible intensity of light.

The distant operator is necessarily the best judge as to the flash received; if, therefore, adjustment is called when the shadow spot is at the center of the disk, *alignment is at fault.*

Accuracy of alignment may be tested by looking into the sun mirror, bringing the eye into line with the unsilvered spot, the reflection of the disk, and reflection of the distant station. If it is found that a line through the center of the unsilvered spot and reflection of the disk strikes a little to one side of the reflection of the distant station, grasp the mirror bar firmly, without loosening the clamp, and slightly turn it, so that the reflection of the distant station will be brought accurately into line. If the reflection of the distant station appears slightly above or below a line through the center of the

unsilvered spot and reflection of the disk, bring it into line by pressing the front or rear tripod legs farther to the ground, as the case may require.

33. The tendency of the shadow spot to move off the disk, due to the apparent motion of the sun, is compensated for, without interrupting signals, by means of the tangent screws of the sun mirror. The movement imparted to the mirror by these screws does not disturb alignment, as its center (the unsilvered spot) is at the intersection of the axes of revolution.

34. The manipulation of the instrument involves but slight manual labor; the strain on the eyes, however, from the flash of the mirror in receiving, is often considerable, but may be modified by the use of stained glasses.

Ability to read signals from the heliograph may be readily acquired, but may also be as readily lost if practice be discontinued before proficiency is attained. It should therefore be the endeavor to acquire such facility, not only in sending but in receiving, that habit will come

to the aid even after the lapse of considerable time.

35. Minor parts of the instrument should be dismounted only to effect repair. All steel should be preserved from rust, and tangent screws and bearings from dust and grit. The mirrors should invariably be wiped clean before using.

In case of accident to the sun mirror the station mirror may be made available as such by removing the paper disk.

36. The projection of the rays of the sun upon a screen, by reflection from plane mirrors, demonstrates that for short distances (varying with the size of the mirrors employed) the figures of illumination are similar to those of the mirrors used. Removing the mirrors to a greater distance from the screen, it is found that the shapes of the mirrors are no longer reflected, but that all images are circular and of the same diameter.

Removing the mirrors to a still greater distance, it is found that the various images are circular as before and of the same diameter, but that this latter diameter is greater than the one

previously obtained. Repeating the experiment at increased distances, these results are confirmed, with the following conclusions:

a. That up to a certain distance the form of the mirror is reflected upon the screen.

b. That this distance once exceeded, the reflected images obtained from mirrors of various shapes and sizes are all circular and of equal diameters at equal distances.

c. That the greater the distance from the mirror to the screen, the greater the diameter of the reflected image.

d. That the images vary in brightness, the larger mirrors producing the brighter images.

It is therefore evident that the advantage derived from the use of a large mirror consists, not in any increase in the size of the flash, but in an increase of brightness—that is, capability of overcoming such obstructions as fog, smoke, haze, and consequently distance.

37. The light from the sun is projected upon the surface of the mirror in a cone of rays, and is reflected in a cone of the same dimensions. The angle within which the reflection is visible

is that subtended by the diameter of the sun. The limit of the lateral extension of the flash at any given distance may therefore be definitely determined.

It is found that the circle of illumination has a diameter which increases sixteen and one-third yards for every mile of distance from the mirror.

As the diameter of the flash increases directly with the distance between stations, adjustment of the instrument is quite as simple and certain for great as for short distances. Although the margin of flash is ample, so that signals may be directed upon a station, however distant, with certainty, yet it is so slight relative to the distance between communicating points that signals are invisible to one far out of the direct line, and are therefore not liable to be read by those for whom not intended.

38. The range over which signaling may be effected under favorable atmospheric conditions is limited only by the convexity of the earth. The square mirror is adopted in preference to the round, as containing about one-fourth more

reflecting surface for practically the same packing space.

Signaling at night, in the squad room, may be effected by the employment of artificial light.

39. *Powers and limitations of the heliograph.*—Portability, great range, comparative rapidity of operation, and the invisibility of the signals, except to observers located approximately on a right line joining the stations between which communication is had, are some of the advantages derived from using the heliograph in visual signaling.

The principal disadvantages result from the entire dependence of the instrument upon the presence of sunlight and that when within range it is an attractive target. The normal working range of the heliograph is about 30 miles, under favorable circumstances though, instances of its having attained ranges many times greater than this are of record. The heliograph can be depended upon to transmit from 5 to 12 words per minute.

FIELD STATIONS

40. Each station should have its own signal or call letter. A terminal station should be manned by a non-commissioned officer and three men, and an intermediate station by an officer and six men. A central station requires three men to each station with which it is in communication.

Continuous work requires a sufficient number of men to form three reliefs. Each relief should consist of the number of men stated above. The tour for each relief should be four hours.

41. When signaling with the flag, one man calls off the letters, another sends, while the third watches the distant station.

In receiving, one of the men reads, one records, and the other is stationed at the sending point, with flag at "front," to break if necessary.

When signaling with a heliograph, one man calls off, one sends, and the third keeps adjust-

ment. The man sending keeps watch of the distant station. In receiving, one man reads, another records, and the third keeps adjustment. The man who reads stands at shutter to break if necessary.

If the recorder sees that a word is not intelligible, or if the readers are in doubt about a letter, the sender immediately breaks the sending station and signals "Interrogatory A," followed by the last word correctly received.

42. The officer or non-commissioned officer in charge of the station is responsible for everything in connection with it. He gives his entire attention to the working of the station, and *will compel each member of the party to attend strictly to his own business.* He continually notes the correctness of the adjustment of the heliograph, and tests its alignment from time to time. He has charge of the apparatus and equipments, and sees that all messages are correctly copied and transmitted, either to the communicating station or to the person for whom they are intended.

The person in charge of a station may never

take it upon himself to make any alterations in a message. He must bear in mind the confidential nature of the work, and will see that unauthorized persons do not loiter about the station, and that no one interferes with the work of the party. No talking can be allowed while actual work is going on, beyond the necessary calling off, and giving of orders.

An exact copy of every message sent and received must always be kept, with date and hour of receipt and transmission.

Communications transmitted by signals are always confidential, and will only be revealed to those officially entitled to receive them.

43. A strict watch upon all other stations, and upon points from which calls are likely to come, must be kept at all times.

Failure promptly to recognize and reply to calls, or correctly to receive and transmit messages, is punishable, in case of either officers or enlisted men, as neglect of duty.

In case the sending station cannot get an answering signal, but has reason to believe that its

own signals are visible, it should send the message repeatedly.

It must be remembered that it is the duty of the signal corps to transmit messages, and any excuse for a failure to do so may well be received with ill grace. Faithful, persistent, and, it may be, desperate efforts, must be made to fulfill requirements, though in the face of unlooked-for and adverse circumstances.

44. It should be remembered that accuracy is of paramount importance, and rapidity in signaling must always be subordinated to it. If any doubt as to a character exists, the sender will be required to repeat it.

45. In field work it is imperative that the greatest care be taken in selecting the station.

Stations ought not, when it can be avoided, to be located exactly on an east and west line, or in the line of the apparent course of the sun. It is impossible to signal in the line of the rising or setting sun, not only on account of the blinding light, but because of the haze in which the landscape in the direction of the sun is very liable to seem to be enveloped.

A station should not, if avoidable, be located in a camp, or where the white canvas of tents is liable to form the background. The maneuvering of troops in an encampment, the passage of individuals, the smoke from the kitchens, and the curiosity of persons not attached to the station, make a camp the most unsuitable locality for a signal station.

The point chosen should be near the headquarters of the commanding officer, but outside of the camp and on one side of it. If no natural height presents, a platform may be built in the top of a tree, or a scaffold erected from the ground.

46. Stations should invariably be on the most elevated ground accessible, and should never, if avoidable, be placed on low land. The undulation of the atmosphere noticeable on a hot summer day is always less at a distance from the earth's surface, while in the cool night air the smoke and dust of the day and the heavy moving mists lie close to the ground, obscuring the lowlands.

Stations on the tops of city buildings should,

when possible, be so located as not to be visible from the street.

47. Signal officers should always be supplied



Flag station, parapet of high building.

with the best obtainable maps of the district in which they may be working.

The maps should have altitudes indicated in figures. In selecting stations from a map and calculating the height of intervening elevations, due allowance should be made for the curvature of the earth.

48. The following table shows the extent of horizon for different heights above the sea

level; that is, it shows how far an object at the sea level can be seen.

Height of the eye above sea level (in feet)	Distance (in statute miles)	Height of the eye above sea level (in feet)	Distance (in statute miles)
10	4	115	14
15	5	130	15
20	6	150	16
30	7	200	18
40	8	230	20
50	9	300	23
60	10	350	25
70	11	500	30
85	12	700	35
100	13	900	40

Hence, an observer whose eye is 30 feet above the sea can distinguish an object 7 miles distant, providing it is at the sea level; but if the object is itself 15 feet above the sea he can make it out $7 + 5 = 12$ miles off.

Officers should enter in the field books, provided for the purpose, sketches and minute descriptions of the location of stations upon which they have worked, showing upon the sketch,

lines leading to other stations with which communication may be held, with magnetic courses to the same, and any notes or information which might aid in quickly locating the station at some future time.

49. In signaling with the flag, *the background is of vital importance.*

It should be of one color, and the flagman should be so placed that all the motions will be outlined against it when viewed from the communicating station. Dark colored backgrounds, such as green fields or woods, are the most satisfactory. Sky backgrounds are excellent, but are difficult to obtain.

The background may be a long distance, sometimes many miles, behind the station. To determine what the background will be, move along the line of vision in front of your station, the head accurately in line with the distant station, and observe your background from that position.

The flag used must be of the color which contrasts most greatly with the color of the background. In the case of landscape backgrounds

the white flag should be used. With sky backgrounds use black flags. With mixed backgrounds, red flags. In nine cases out of ten the white flag will be found best.

50. It is important that every motion and position of the flag be visible at the receiving station. It is possible that trees or bushes may hide the flag in one of its motions, although they be a long way off.

To determine that the flagman is so placed that nothing obstructs a view of the flag in any of its motions, when viewed from the receiving station, go to the points to the right, left, and front of the flagman, and, stooping down, with the face at about the height of the flag at its lowest point, see if the farther station be visible from there. If so, then rise, and see if the farther station is visible as you rise.

The above precaution should always be taken.

51. When signaling with the heliograph, it will often be necessary, in opening communication, to find the direction by compass. After the course has been found the instrument should be sighted as nearly as possible on the point

where the distant station is supposed to be, and the flash swept by the slow motion screws slowly back and forth in a small arc, occasionally changing it to a little higher or lower plane.

Attention may often be attracted by taking a spare mirror and flashing it toward the distant station. The flash may be directed by selecting some near object nearly in line with the distant station, as a reference point.

THE ARDOIS SYSTEM

GENERAL SERVICE CODE

52. The Ardois system, used in the United States Army and Navy, is a display of four lights, each of which may be made either red or white. These lights are incandescent lamps, operated by a keyboard conveniently placed at the station. The red light indicates a dot and the white light a dash, so that the characters of the General Service Code are made by combinations of red and white lights.

If the lights are arranged vertically, as when swung from a staff or spar, they are read from the top downward. If the lights are placed horizontally, they are read from the sender's right to his left.

Example: Red-white, or dot-dash, represents the letter A; and white-red-red-red, or dash-dot-dot-dot, represents the letter B.

For numerals in the Ardois system, second-

**EMERGENCY SIGNALS FOR USE ON CABLE AND TELE-
GRAPH LINES**

62. The general attention or emergency call for use on cable or land telegraph lines is the numeral "9." It will be sent out only by the proper authority and will have its meaning clearly understood. Upon hearing the call, all operators will give way, but they will remain at their instruments until relieved. They will not cut in unless called. The numeral "9" as an emergency call may be used in anticipation of attack or riot; it may be used to indicate a conflagration or other danger and should be used only in case of need. This signal is of great importance and should be thoroughly understood by all cable and telegraph operators. It should be conspicuously posted with appropriate instructions as to its meaning and use in all cable and telegraph stations.

EMERGENCY SIGNALS FOR USE IN RADIOTELEGRAPHY

63. The radio distress signal for use at sea is the international signal SOS. It is a universal signal and is of paramount importance. Its

meaning should be thoroughly understood by all radio operators, and should be conspicuously posted with appropriate instructions in all radio stations of the Army whether on ship or ashore.

The operator of any Army radio station aboard ship, upon receiving an SOS signal, will immediately ascertain the exact position, in latitude and longitude, of the vessel sending the signal. When this information has been received, the operator will immediately have the same delivered to the officer in charge of the ship, who will take the necessary action.

NOTICE TO BE POSTED IN ALL RADIO STATIONS

64. The following is from the report of the International Radiotelegraphic Conference, London, 1912:

Ships in distress shall make use of the following signal:

... — — — ...

repeated at short intervals, followed by the necessary particulars.

As soon as a station hears the signal of distress, it must suspend all correspondence and

must not resume the same until after it has made sure that the communication consequent upon the call for help is finished.

The stations which hear a call of distress must act according to the indications given by the ship which makes the call, with regard to the order of messages or their cessation.

When, at the end of a series of distress calls, there is added the call-signal of a particular station, the reply to the call is proper to that station only, unless that station does not reply. Failing the indication of a particular station in the call for help, every station that hears the call shall be bound to reply thereto.

SIGNALS OF DISTRESS ON ARMY TRANSPORTS, AND VESSELS UNDER CONTROL OF THE ARMY

65. The signal of distress on Army transports shall be, either together or separately, as follows:

In the daytime—

First. A gun or other explosive signal fired at intervals of about one minute.

Second. The International Code signal of distress indicated by NC.

Third. The distance signal, consisting of a square flag having either above or below it a ball or anything resembling a ball.

Fourth. A continuous sounding with any fog-signal apparatus.

At night—

First. A gun or other explosive signal fired at intervals of about one minute.

Second. Flames on the vessel (as from a burning tar barrel, oil barrel, etc.).

Third. Rockets or shells throwing standard Army transport night signals, fired one at a time, at short intervals.

Fourth. A continuous sounding with any fog-signal apparatus.

These signals require no answer, but any station hearing or seeing them should make every effort to assist the ship in distress.

On Army transports the fire signal is the continuous and rapid ringing of the ship's bell for a period of not less than 20 seconds, and this signal shall not be used for any other purpose

whatsoever. An emergency or alarm signal, indicating the approach of danger from rocks, shoal water, collision, etc., is made by the rapid and continuous short blasts of the whistle.

These signals will apply, so far as practicable, to all vessels under the control of the War Department, both in peace and war.

EMERGENCY SIGNALS WITH BOMBS (OR OTHER EXPLOSIVE), SMALL ARMS, OR THE NATIONAL ENSIGN

66. A general attention or alarm signal, indicating attack, riot, conflagration, or other emergency, will be made by sound signals, when authorized as previously indicated, by one discharge of a cannon, rifle, pistol, or *smoke* bomb by day, followed by a smoke rocket at half-minute intervals. At night, by one discharge of cannon, small arm, or *light* bomb, followed by a red rocket at half-minute intervals. This signal requires no answer.

Used as an emergency signal it will serve to call all troops to attention, and should be followed by a preconcerted signal to indicate the

character of the alarm given or to communicate instructions. As an instance, a smoke bomb followed by a rocket is a call to attention and will indicate riot or attack, upon receiving which all troops will fall into ranks under arms. Should the first rocket be followed by a second, the signal will indicate a conflagration or other danger, and all troops noting it will fall into ranks prepared to fight fire or to meet other danger (such as flood).

If no bombs or rockets are at hand at the camp or station for use with sound signals of this character, a general-alarm signal will be made by a rapid discharge of shots. None of these signals requires an answer.

With the national flag the distress signal, universally understood is made by flying the ensign union down.

EMERGENCY SIGNALS BY SOUND WITH BELL, WHISTLE, FOGHORN, BUGLE, TRUMPET, OR DRUM

67. General attention, distress, or alarm signals may be made by rapidly repeated strokes of the bell, blasts of foghorn or whistle, call of bu-

gle or trumpet, or tap of drum. These signals, explained beforehand and thoroughly understood, require no acknowledgment, but should be acted upon immediately.

In addition to the dot and dash signals, the bugle, the trumpet, and the whistle may be used for signaling as in the Drill and Field Service Regulations of the Army.

The long roll of the drum will be recognized as an emergency signal. When used in the Army it is a general-alarm signal and requires all troops to fall into ranks.

68. *It is recommended that the instructions regarding emergency signals, their use and meaning, be posted in all radio and signal stations of the Army, at headquarters in garrison or in the field, at the guardhouse of military posts, at the guard tents of troops in the field, and that they be communicated as part of the instructions to officers and to soldiers on guard duty.*

MESSAGES IN CIPHER

69. In active service all messages should be transmitted in cipher. The United States Army cipher disk consists of two disks fastened concentrically together in such a way that they may be revolved one upon the other.

Around the edge of the larger disk the alphabet is written from left to right; on the smaller one, from right to left.


If there be no previous agreement, "A" on the inner circle will be set opposite "A" of the outer circle.

The letters of the message, which is written in plain English, are found on the one circle, and the letters opposite them on the other circle signaled.

The operator at the receiving station writes the message down as it is sent, and afterward translates it by using his own disk, which should be adjusted the same as that of the sender.

70. It is usual to agree on a cipher word in

advance. The message is divided into groups of five letters each. The first *group* is enciphered by setting the arrow on the inner disk at the first letter of the cipher word on the outer circle. The second group is enciphered by setting the arrow at the second letter of the cipher

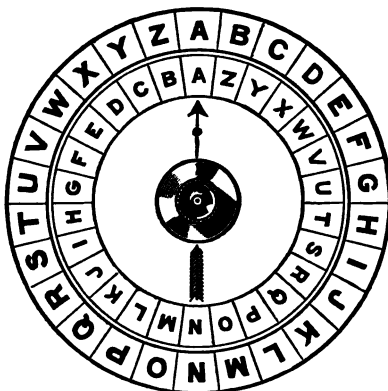

word, and so on. When all the letters of the cipher word have been used in turn, commence at the first letter again.

In signaling, a front or space signal is made after each group.

In enciphering or deciphering a message, it makes no difference which disk the letters are found on. The result is the same whether one finds a letter on the outer circle and records the letter opposite it on the inner circle, or finds the letter on the inner circle and records the letter opposite it on the outer circle. The circles may be used indifferently.

71. Messages sent in cipher should, to prevent errors, be repeated back by the receiving station. This should be done group by group—i. e., as soon as a group of four letters is received, it should be repeated back before the next group is sent.

Cipher dispatches to which the key is unknown may often be deciphered by the rule of frequency of occurrence of letters.

The order of precedence among the letters, according to the frequency of their occurrence, is as follows: e, a, o, i, t, d, h, n, r, s, u, y, c, f, g, l, m, w, b, k, p, j, q, x, z.

The most frequent compounds are: th, ng, ee, ll, mm, tt, dd, and nn.

72. Important dispatches by courier should

not only be written in cipher, but may be written in invisible ink made as follows:

Chloride of cobalt..... 50 grains;
Distilled water 1 fluid ounce;
Glycerin 10 minims.

Dissolve the chloride of cobalt in the distilled water and add the glycerin.

Writing executed with this ink is invisible on paper, but, on warming, the writing turns blue. On exposure to damp air it becomes invisible again.

THE COMPASS AND HOW TO USE IT

73. In long range signaling with a heliograph and in much other signal work it will often be necessary to use the compass, especially when the line and stations are selected by the map. In finding the course from one station to another by the map it must be remembered that the meridian lines run toward the true north while the compass needle points to the magnetic north. A compass is of no assistance unless its use is thoroughly understood. It is not as simple to use as a watch and in itself does not point a course as a weather vane points into the wind.

74. The best compass for military work is that called the "Box Compass" mounted in a square wooden box about three inches on a side. It is graduated to degrees and reads from zero around to 360 degrees, zero being the north point. The north and south line is at right angles to the side to which the cover is hinged, and the cover has a sighting line cut in its underside,

so that when open the line is in prolongation of the north and south line of the dial.

In this compass the west is on the right-hand side of north, and east on the left hand, so that when the needle points to the given bearing the sight line will point in the desired direction. This saves calculation and confusion; but when *taking* a bearing with the compass it must be borne in mind that the east and west are reversed.

75. In using a compass it should be borne in mind that the needle always points in a known direction, but that direction is not north, at least the needle points to true north only in a few places. The needle points to the magnetic north pole, which is nowhere near the geographical pole. The difference in direction between the magnetic north and true north is called the "declination" or "variation" of the compass and is measured by degrees. The variation for the locality in question must be known or you will go far astray. For example, the declination in East New Brunswick is 25 degrees west, in Central Michigan 0, and in Vancouver Island

25 degrees east (see table of magnetic declination in the United States).

76. To illustrate the declination of the com-



pass, take the map of the United States, draw a line from Mackinac Island, in Lake Michigan, to Savannah, Georgia. At all points on this line, roughly speaking, the compass needle points

to true north. At all points east of this line, which is called the Agonic line or Zero Curve, the north end of the needle points to the west of true north and at all points west of the line to the east of true north. The farther you are away from the Agonic line the greater the declination of the needle. The declination increases east or west from the line at about the rate of one minute per mile—one degree in sixty miles.

77. In finding the magnetic course on a map with a protractor, allowance must be made for the variation of the needle. If the protractor reading between two points be on that side of north to which the needle varies, the amount of the variation must be *subtracted* from the protractor reading to get the magnetic course. If the protractor reading between the points be on the opposite of north from that to which the needle varies, then the variation must be *added* to the reading to get the magnetic course.

78. In using a map spread it out flat and lay the compass on it with the N-S line parallel to the N-S line of the map. Revolve the map until the needle points to the proper amount of dec-

height of a given point can be computed by counting the lines. Sometimes every fifth line is heavier than the intermediary lines. If the contours show no figures giving the elevations, then the existence of water must be one's guide in distinguishing water-sheds and water-courses. Look to the lie and direction of the streams. Their general trend will indicate their lowest levels. Observe where the contour lines project *toward* the streams as this shows the position of water-sheds and spurs; where they *recede* shows the ravines, gorges and valleys.


90. In computing elevations Contour *Intervals* and not contours must be counted. The lowest contour—our original water line in the illustration—must be considered as 0 and not as 1.

91. In addition to contours certain standard symbols are used to represent features on a map. These symbols are designed to suggest the objects for which they stand. In colored maps water is always blue and contours are brown or red.

92. One of the difficulties in making use of

maps is that they may not be corrected up to date and time may be lost in trying to find roads and other features that have ceased to exist, or to locate on the map new features that have been constructed since it was drawn. For this

CROSSINGS OF RIVERS

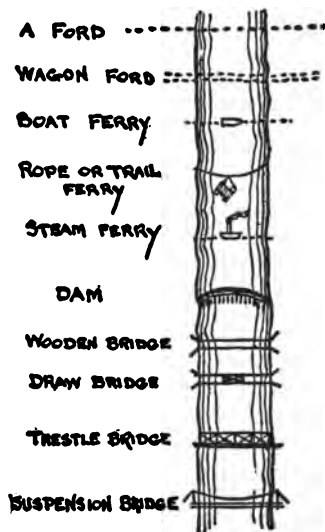

reason always obtain the latest possible map of any region in which you are operating.


RAILROAD




ROADS



CONTOURS-
A HILL



TRAIL OR PATH



OR LIKE THIS



BOUNDARIES



HOUSES OR CAMPS



UNIVERSITY OF MICHIGAN



3 9015 06277 0063

